TP-Poster Series

Let shop window brighter and more clear, Lets customers experience the scenery outside window, & make each store capture every selling point.

CE•

Key Features

Standardization

Standard display, fixed size and display size.

Simple

Simple control, plug and play, simple and deft style, t.m11 high effective work.



Freestyle

Randomly applied to each indoor scene, flexible and vaned, a tnully moving advertising medium.



Process design

Arc line and metal texture, bonding craft and design beauty.



SUPERIOR LED
DISPLAYS

TP-Poster

Screen Size

700 X 1000, 2000 X 1500, 2000 X 2500

Application Scenarios

Glass wall

Post Screen Series

- Transparency: 85%
- Brightness : 5000cd/m'
- Depth: 37mm
- Viewing Angle: 160°

Super transparent | Smart | Simple | Energy saving

Other Features

Super(or ultra) transparent

More than 85% transparency, the highest transparency in led screen industry.



High contrast ratio

High contrast ratio 1500:1, stunning color, dynamic image and eye-catching.

Smart

Smart control by mobile APP, wireless data transmission, screen+data cloud+APP WIFI connection.

Wider advertising Scope

160° viewing angle, eye-catching and wide scope.

Energy saving

Less than 170W power consumption per square meter.



High refresh rate

High refresh rate: in the industry, the minimum pixel pitch (able to mass production) 3mm, 3840HZ refresh rate.

3840HZ 60HZ

TP-Poster Series

Dimensions (Inches)

29.33X 46.26X1.46
55.12 Lbs./pc

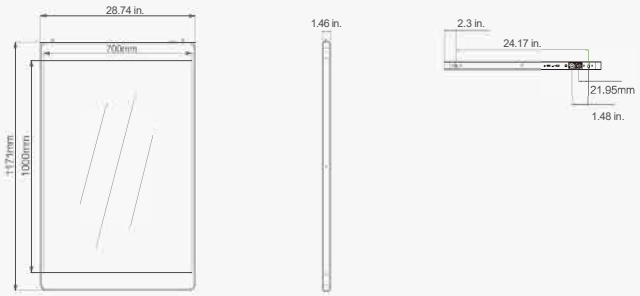

80.71X103.19X3.46
265.55 Lbs./pc

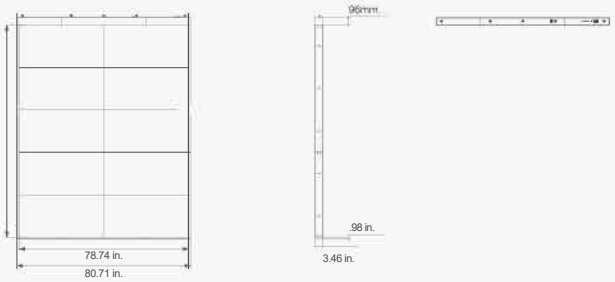

80.71X 63.82 X 3.46/
158.73 Lbs./pc

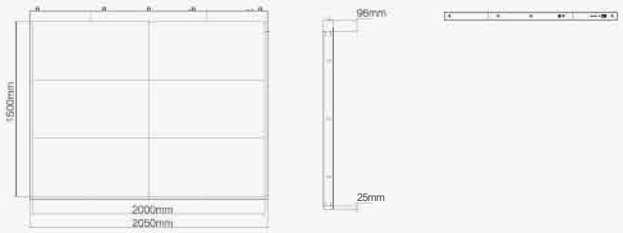

Connectivity

0 POWER
f) LAN
9 WIFI
8 USB
0 CLOUDS
Ci) HEADSET
0 RESET
Ci) HDMI

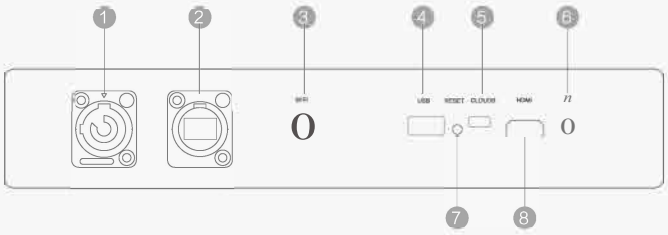

Specifications

Size (Inches)	27.56 X 39.37		78.74 X 59.06	2000 X2500
Model	P2	P3	P3	P3
Pixel Pitch (mm)	2.87 X 5.74	3.9 X 7.8	3.9 X 7.8	3.9 X 7.8
Pixel Density {dot/ m²)	60552	32768	32768	32768
The overall size(inches)	29.33X46.26X1.46	29.33X46.26X1.46	80.71X103.19X3.46	80.71X103.19X3.46
Module Resolution (dot)	244X172	178X128	512 X 192	512X320
LED Type	SMD3in 1	SMD3 in 1	SMD3in 1	SMD3in 1
Brightness (cd/ m²)	3000	5000	5000	5000
Transparency	80%	85%	85%	85%
Viewing Angle	160°	160°	160°	160°
Grey Level	14 bits	14 bits	14 bits	14 bits
Scan Mode	1/6	1/4	1/4	1/4
Refesh Rate (Hz)	3840	3840	3840	3840
Frame Frequency (Hz)	60	60	60	60
Avg.Power Consumption	240	200	900	1500
Max.Power Consumption	800	800	3000	5000
Maintenance	Back	Back	Back	Back
IP	IP42	IP42	IP42	IP42
Working Temp	-4'-122 'F	-4'-122'F	-4'- 122'F	-4'- 122'F
Weight (Lbs/ pc)	55 Lbs	55 Lbs.	158.73 Lbs	264 Lbs

System topology

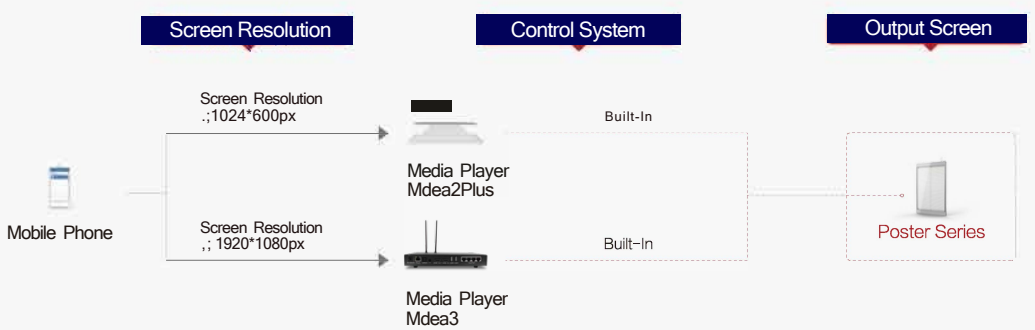

SUPERIOR LED DISPLAYS

Follow us @Superior LED Displays

www.superiorleddisplays.com